



MEDICAL FRIDGE

MINUS40

MED250GHD

MED250GHD Medical Fridge

The MED250GHD Medical Fridge was purpose designed for modern Hospitals and Pharmacies with accurate temperature control that ensures tight tolerances for vaccines, medicines and related items.

This unit is backed by the reputable Minus40 service warranty with maintenance options available to ensure extended longevity of your medical fridge.

Specifications

Fridge Capacity (Litres)	250L
Temperature Range - Fridge	2°C - 8°C
Max Ambient Temperature	35°C

Features

- ✓ Automatic Defrost
- ✓ Even Temperature Distribution
- ✓ Fan Assisted Cooling
- ✓ Low Operating Sound Level
- ✓ Self-Closing Door
- ✓ Lockable Door
- ✓ Internal Light (LED)
- ✓ High/Low Temperature Alarm
- ✓ **NEW** - Built-In Voltage Protector
- ✓ **NEW** - Anti-Freeze Protection
- ✓ **NEW** - 2 Pull-Out Shelves
- ✓ Door Open Alarm
- ✓ Stainless Steel Perforated & Adjustable Shelves
- ✓ External Manual Light Switch
- ✓ Corrosion Proof Stainless Steel Case for Easy Cleaning
- ✓ **NEW** - Hydrocarbon Refrigerant
- ✓ **NEW** - Dirty Condenser Alarm



Hydrocarbon Refrigerant

2°C - 8°C
Accurate Temperature Control


2 Pull-Out Shelves

UV Protection

Stainless Steel Interior & Exterior

Built-In Voltage Protector

PERFORMANCE DATA GRAPH: How The MED250GHD Maintains Temperature Between 3°C And 5°C At 32°C Ambient Temperature

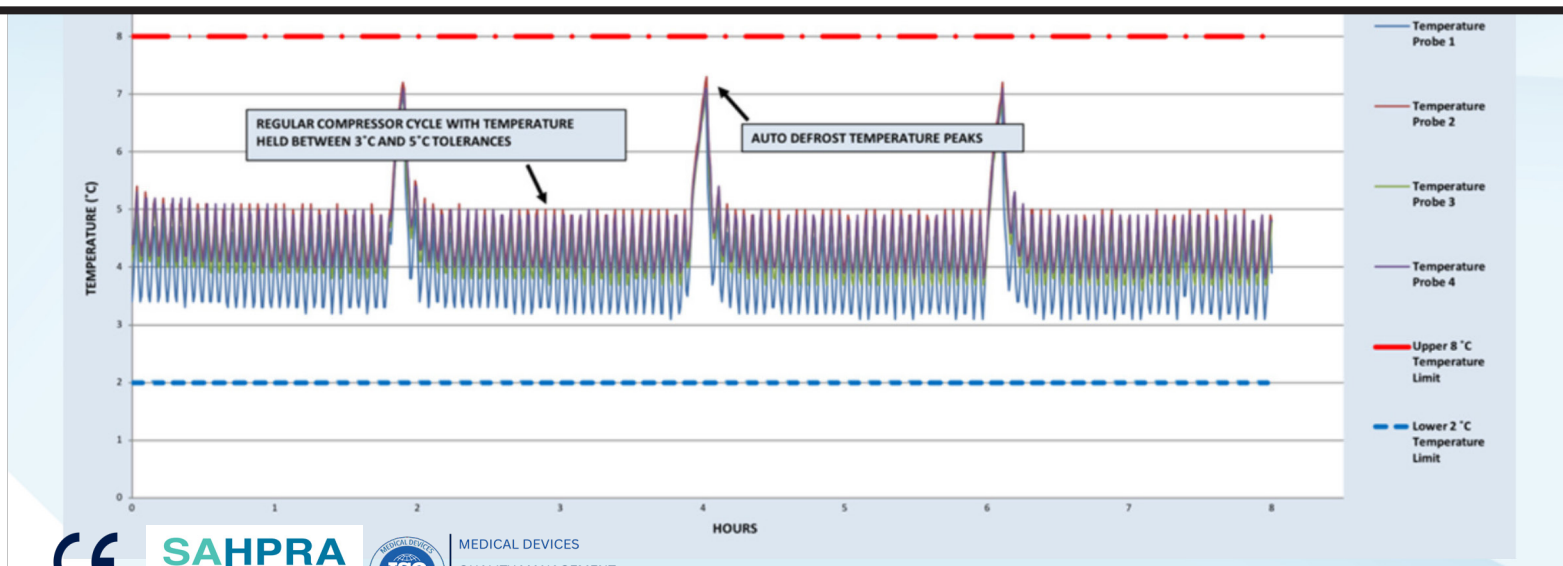

MEDICAL DEVICES
QUALITY MANAGEMENT
ISO 13485:2016 CERTIFIED



Fridge: 2°C to 8°C
Accurate Temperature Control For Medicine & Vaccine Storage.

Lockable Door
A Lockable Door For Enhanced Product Security.

Fan Assisted Cooling
Ensures An Even Temperature Profile Across The Fridge Cabinet.

Temperature Probe Hole
Pre-Fitted Temperature Probe Hole For Independant Temperature Monitoring Devices.

Stainless Steel Interior And Exterior
For Higher Levels Of Hygiene And Easier To Clean.

Anti-Freeze Protection
Prevents Freezing Of Valuable Vaccines And Medication Which Leads To Stock Wastage.

LED Light
Internal LED Light To Prevent Bacteria Growth. Comes With An External Light Switch.

Reliable Digital Controller
Reliable Digital Controller For Accurate Temperature Readings.

Audible And Visual Alarms
Audible And Visual Alarm Indication Is Provided For When The Door Is Left Open, When Temperatures Are Outside The Range Of 2°C to 8°C And When There Is A Blocked / Dirty Condenser.

Unique Door Handle
For Easy Access

UV Protected Glass, Hinged Door
The Self-Closing, UV Protected Glass Door Assists In Maintaining The Temperature Of The Fridge And Protects The Medication & Vaccines From Harmful UV Rays.

Perforated Stainless Steel Shelf
2 Adjustable Perforated Stainless Steel Shelf For Higher Levels Of Hygiene And Better Air Flow.

Perforated Stainless Steel Pull-Out Shelf
2 Perforated Stainless Steel Pull-Out Shelf For Higher Levels Of Hygiene, Better Air Flow And Easier Access To Stock.

- Research Centres
- Life Sciences
- Laboratories
- Hospitals
- Pharmacies

OPTIONAL EXTRAS

Minus40 Offers A Variety Of Optional Extra Items Which You Can Purchase To Use Separately Or With Your Minus40 Medical Fridge -



Independant Temperature Monitoring Devices

Minus40 Has A Variety Of Independant Temperature Monitoring Devices For You To Choose From - From The Standard USB Device, To The SMS / Email Alert Devices.



Minus40 Vaccine Cooler Boxes

These Strong, Durable And Reliable Vaccine Cooler Boxes Have Been Designed And Manufactured By Minus40 In Accordance To PQS Standards. They Are Available In The Following Litre Sizes;
3L (VB03), 7L (VB07), 12L (VB12)



MEDICAL DEVICES
QUALITY MANAGEMENT
ISO 13485:2016 CERTIFIED

*Contact Us For Prices On These Additional Items.



Construction

External Material	Stainless Steel
Internal Material	Stainless Steel
Shelves	2 Stainless Steel, Perforated & Adjustable Shelves + 2 Stainless Steel, Perforated Pull-Out Shelves
Door Type	Glass, Hinged Door (Self-Closing Door)
Door Lock	Lockable Door
Lighting	Internal Light (LED)
Light Switch	External Manual Switch
Probe Hole	Comes With A Pre-Fitted Independent Temperature Monitoring Probe Hole
Feet / Base of Unit	Rectangular Base With Levelling Feet

Refrigeration

Compressor(s)	1 Compressor
Cooling Method	Fan Assisted Cooling
Defrost Mode	Automatic Defrost
Refrigerant	R290

Alarms

Temperature Alarm	Audible and Visual Alarm For Temperatures Outside The Range of 2°C to 8°C
Dirty Condenser Alarm	Audible and Visual Alarm
Door Alarm	Audible and Visual Alarm

SPECIAL FEATURES



Hydrocarbon Refrigerant



2 Pull-Out Shelves



UV Protection



Dirty Condenser Alarm



Stainless Steel Interior & Exterior



Built-In Voltage Protector

"If it doesn't say MINUS40- Its not a MINUS40"



MEDICAL DEVICES
QUALITY MANAGEMENT
ISO 13485:2016 CERTIFIED

Model

Model Name	MED250GHD Medical Fridge
Cabinet Type	Upright
Capacity (L) - Fridge	250L

Performance

Temperature Range - Fridge	2°C to 8°C
Max Ambient Temperature	35°C
Controller(s)	1 Digital Controller - with an LED Display.

Dimensions

External Dimensions (H x W x D) mm	1360 x 600 x 680
Internal Dimensions - Fridge (H x W x D) mm	955 x 510 x 515
Weight (Kg)	80Kg

Electrical

Voltage (AC)	220V /50Hz
Rated Power Supply (Amps)	2.8
Electrical Protection	Built-In Voltage Protector
Energy Rating	B Class


ADDITIONAL SERVICES OFFERED



Maintenance Contracts / Service Level Agreements

Minus40 Offers Customer-Focused, Tailored Maintenance Contracts For All Minus40 Branded Products. Don't Wait Till It's Too Late – Let Us Know If You Would Like To Add An Additional Maintenance Contract To Extend The Longevity Of Your Medical Refrigerator.

Scan To View Our Online Instructional Videos



Alternatively,
You May Contact Us On;
+27(0) 21 386 2290

All Of Our Products Are Available For Online Viewing At;
www.minus40.co.za



*The parameters and performance specified in this brochure may be changed without prior notice, due to product upgrading.

**There may be differences between the product images shown in this brochure and the actual products received.